


ESPECIFICACIONES

- Cápsula: electret
- Sensibilidad: -26 dB
- Nivel de salida: de 0 a 2 Vpp
- Respuesta de frecuencia: 100 - 5000 Hz
- Impedancia de salida: 1 k Ω
- Impedancia de carga: 500 Ω - 100 k Ω
- Tiempo del roger beep: 1,2 seg. aproximadamente
- Consumo: 6 mA (emisión)
- Alimentación: pila de 9 V tipo 6F22
- Autonomía: superior a 100 horas (pila alcalina)

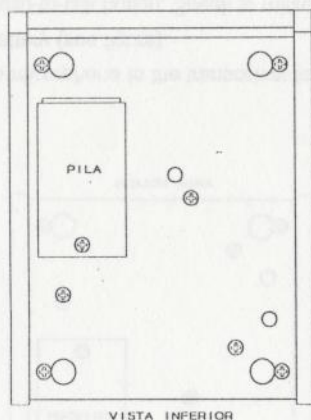

VISTA INFERIOR

CONEXIONADO


Blanco: Audio
Blindaje: Masa
Verde: RX
Marrón: TX

EMPLEO

1. Conectar el micrófono al emisor-receptor siguiendo las instrucciones de conexionado.
2. Insertar la pila en su alojamiento (ver dibujo).
3. Presione la tecla del micrófono y hable para ajustar el nivel de modulación (potenciómetro e indicador de bobina móvil MODUL).
4. El "roger beep" de dos tonos se activa automáticamente cuando se libera la tecla del micrófono.
5. El conmutador situado en la parte posterior del micrófono permite anular la función del "roger beep".
6. El LED rojo deberá iluminarse durante la emisión. En caso contrario, significará que la pila está agotándose y deberá ser sustituida.

SPECIFICATIONS

- Type of element: electret
- Sensitivity : -26 dB
- Output level: from 0 to 2 Vpp
- Frequency response: 100 - 5000 Hz
- Output impedance: 1 k Ω
- Load impedance: 500 Ω - 100 k Ω
- Roger beep time: 1.2 sec. approx.
- Current drain: 6 mA (TX)
- Power supply: 9 V battery (E-Block 9 V, 6LF22 or 6F22 type)
- Battery life: more than 100 hours (alkaline battery)

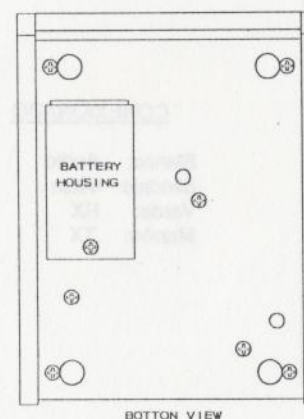

BOTTOM VIEW



WIRING

White: Audio
Shield: Ground
Green: RX
Brown: TX

OPERATION

1. Connect the microphone to the transceiver following the wiring norm.
2. Insert the battery (see figure).
3. Press the push-to-talk button. Speak to microphone and adjust the modulation (MODUL) level.
4. The dual tone roger beep is automatically activated when releasing the PTT button.
5. The "Roger beep" function can be eliminated by means of the switch placed on the rear side.
6. The red LED lights during transmission. If not, the battery is low and should be replaced.



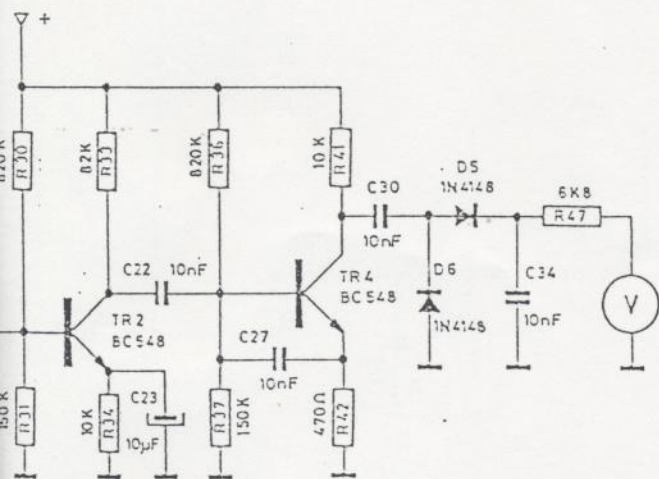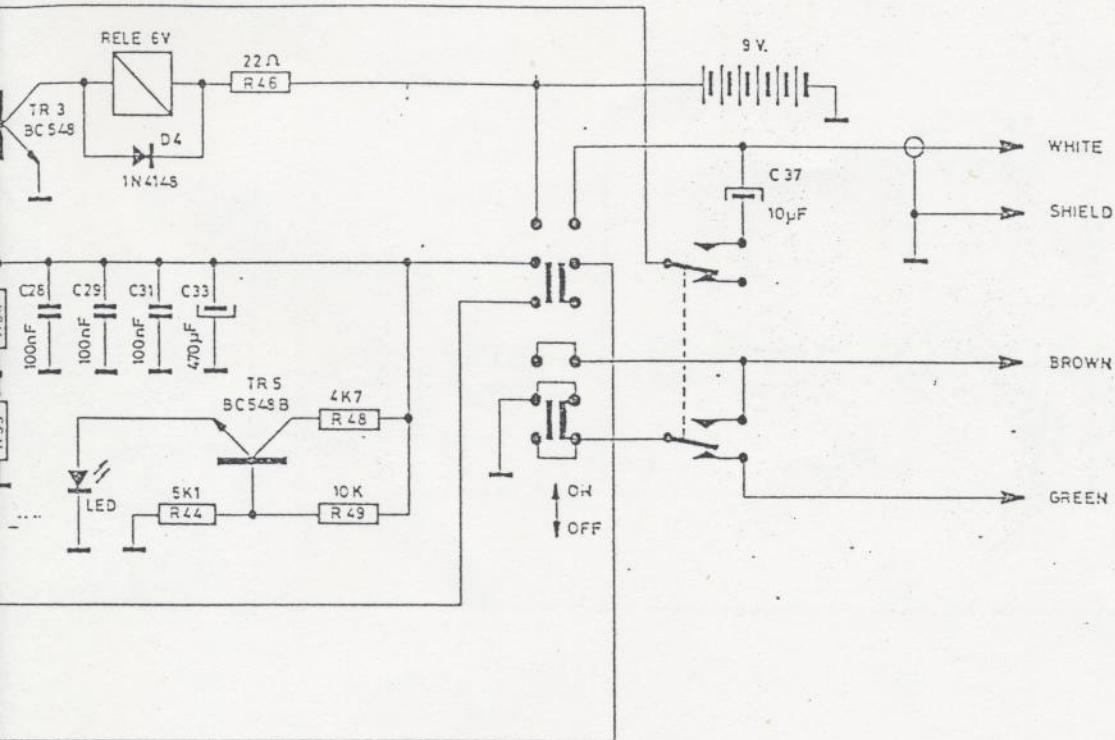

1	11/11/16	100%	Modif. valor C2, C8 y R13
for	fecha	modificación	MODIFICACIONES
Tercera edición:			
4101 BRAND PLUS Special SCHEMATIC DIAGRAM			
SADELTA			31/000

