


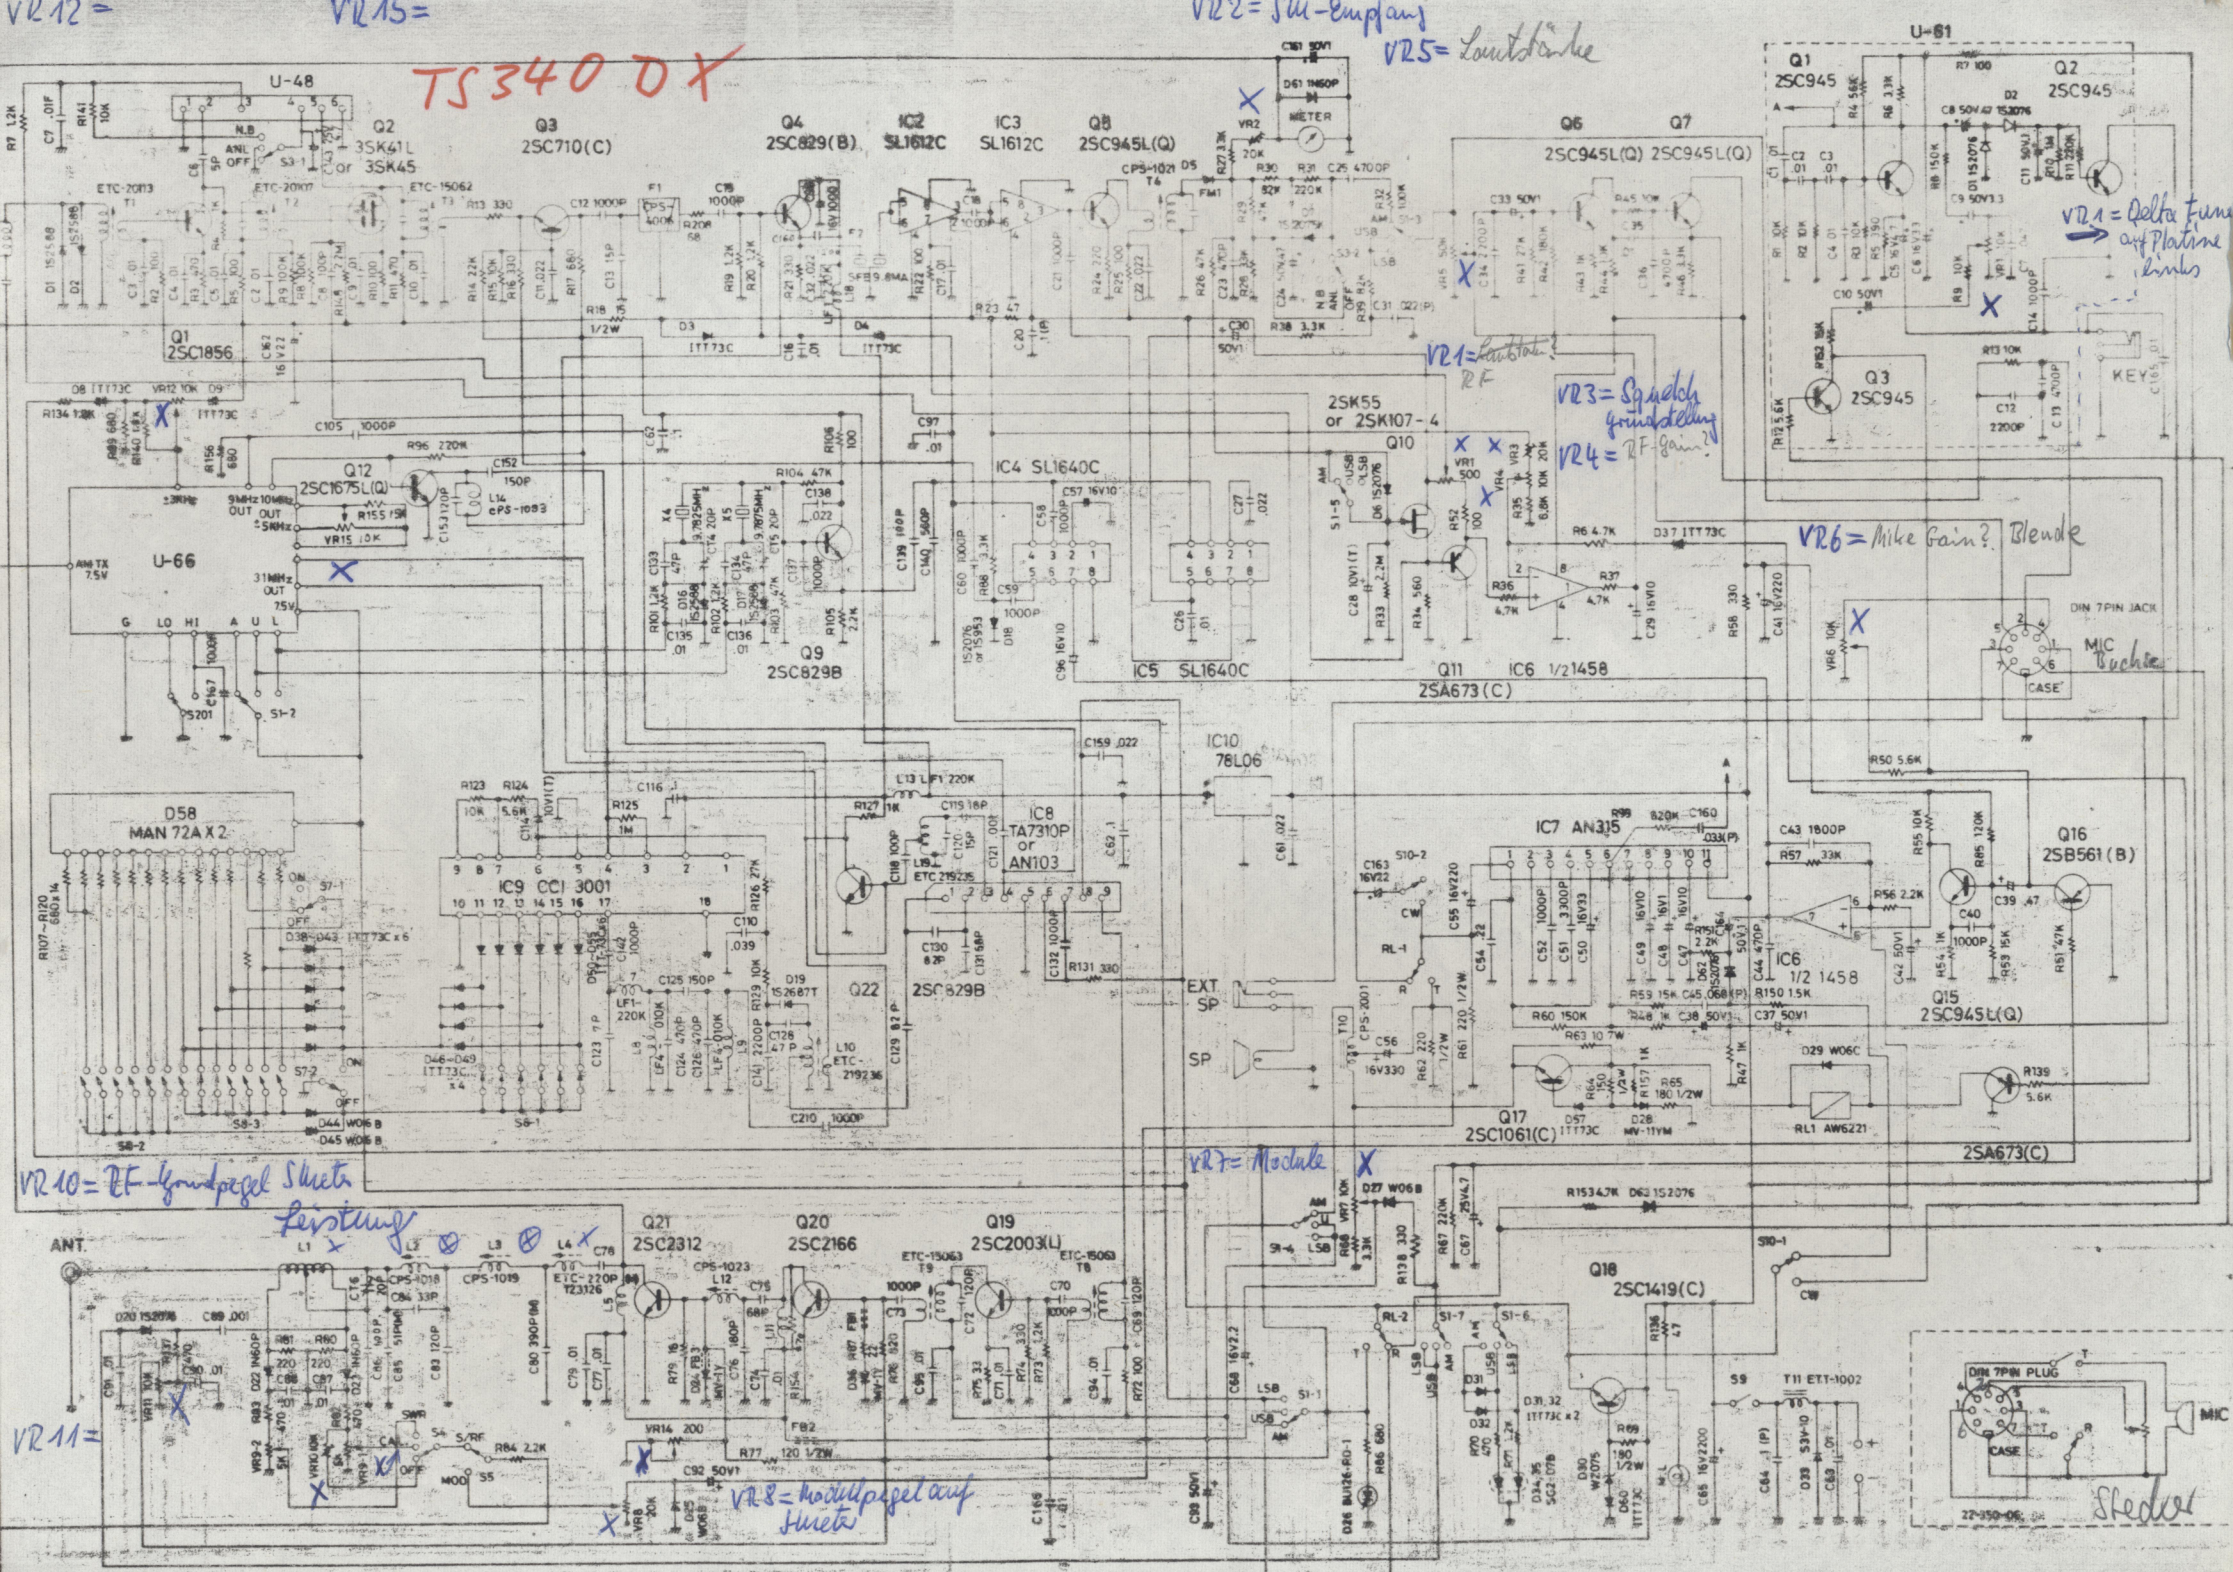

TS 340 DX

ACCESSORY JACK


The 7-pin DIN standard accessory jack has the following connections:

1. Internal speaker (Z 8 Ohm)
2. Audio detector output
3. Audio output (Z 8 Ohm-32 Ohm)
4. Microphone input (Z 600-10 K Ohm)
5. External Vol. Control
6. +12 Volt
7. transmit/receive switching


Case = ground

Always operate the transceiver with the shortening plug inserted in the accessory jack, or with the following external connections:


1. Headset or Telephoneset with PTT.

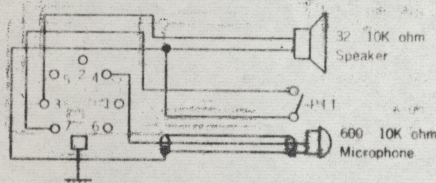

3. Headset or Telephoneset with VOX.

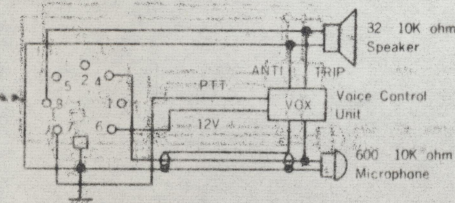


4. External microphone / speaker with PTT.

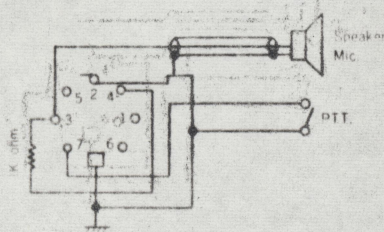

5. PARROT 76

Selection

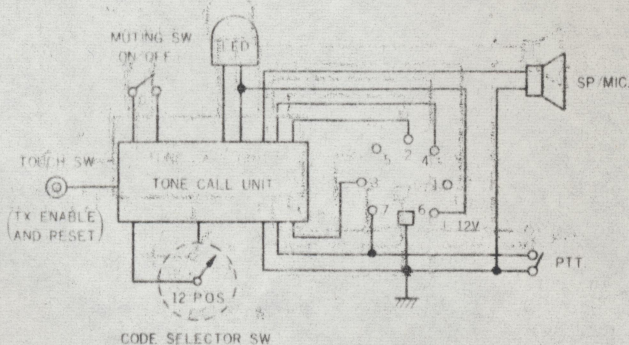

Soka TS 780 DX

VR1 = 5m RX

VR3 = Mod

VR4 = Power

VR11 = Power FM

VR20 = FM-Hub

Soka 1215 DX

unit test-Sm

0
5m
TX
grd
Power +
(5m TX)

0 mod

5m RX