


TS624S SCHEMATIC DIAGRAM

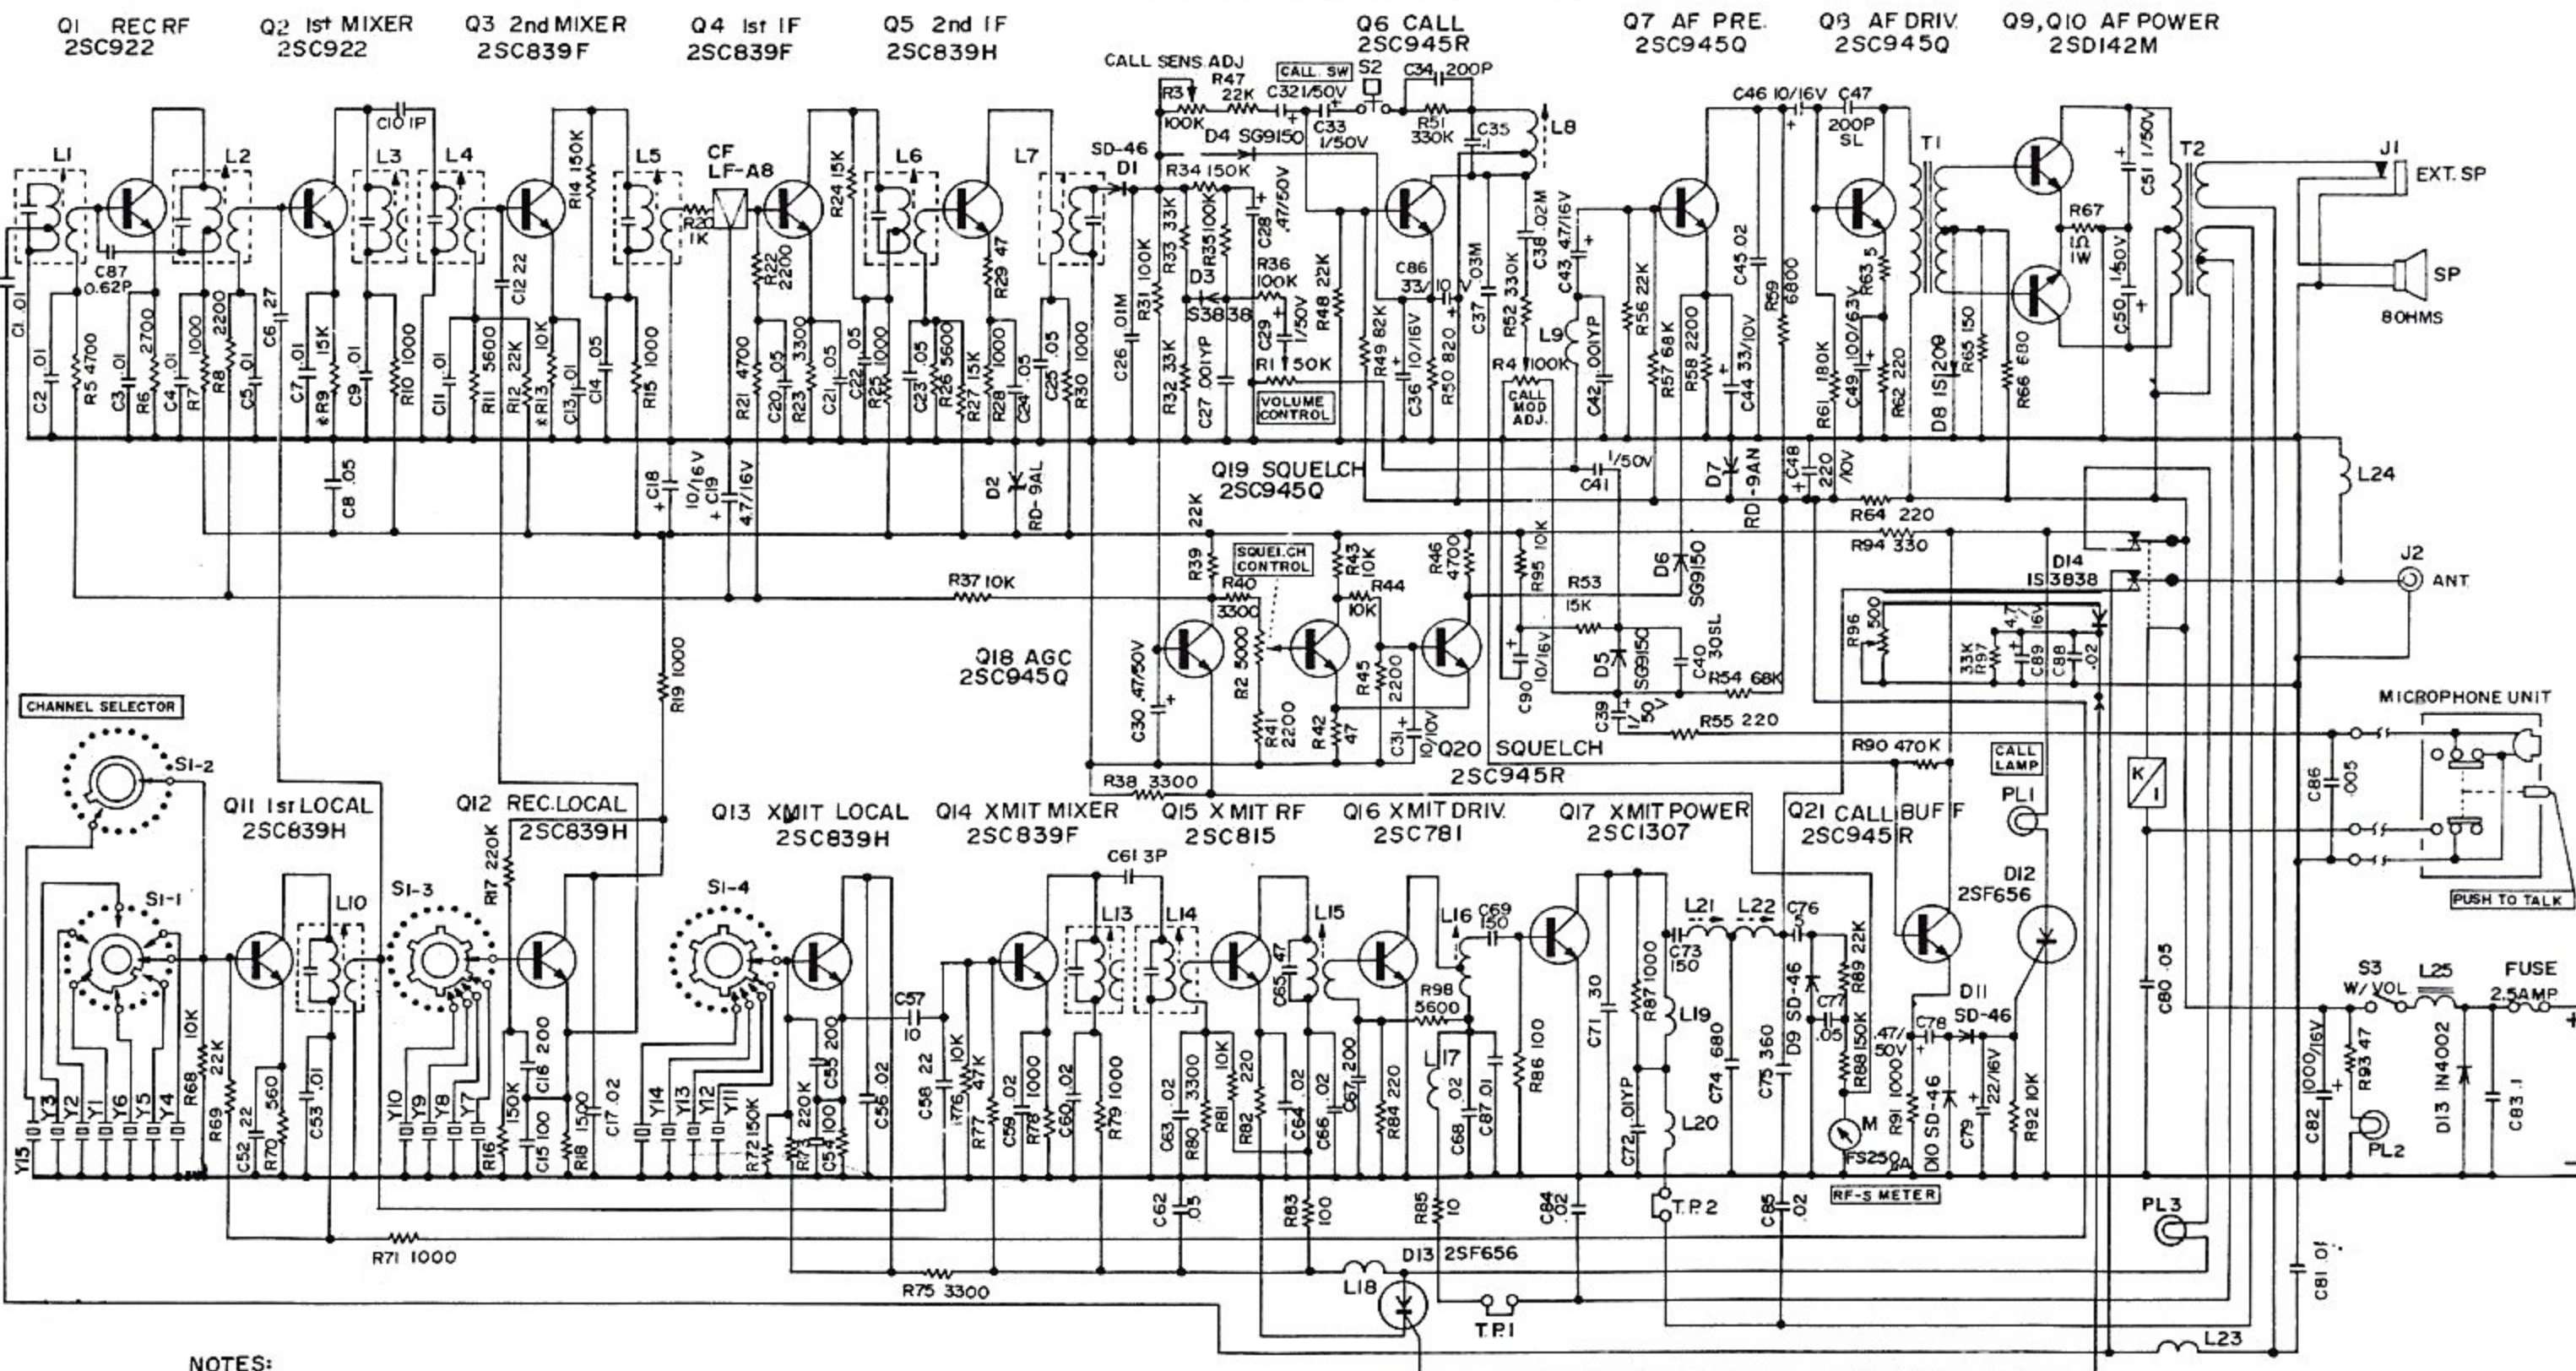

NOTES:

1. ALL RESISTANCE VALUES ARE IN OHMS UNLESS OTHERWISE SPECIFIED.
2. ALL RESISTANCE ARE 1/2 WATTS UNLESS OTHERWISE SPECIFIED.
3. ALL CAPACITANCE VALUES EXPRESSED AS WHOLE NUMBERS ARE IN MICROMICROFARADS UNLESS OTHERWISE SPECIFIED.
4. SIGNAL LEVEL MEASUREMENT CONDITIONS FOR 1/2 WATTS AUDIO OUTPUT.
5. CHANNEL SELECTOR SI SHOWN IN CHANNEL 1 POSITION.

6. FREQUENCY SYNTHESIZER CRYSTAL FREQUENCIES ARE AS FOLLOWS:

Y1	37.600 MHZ	Y7	10.180	Y11	10.635
Y2	37.650	Y8	10.170	Y12	10.625
Y3	37.700	Y9	10.160	Y13	10.615
Y4	37.750	Y10	10.140	Y14	10.595
Y5	37.800				
Y6	37.850			Y15	37.890