


Galaxy DX Radios DX2517

Documentation Project

CBTricks.com


ANF P.C.B. EPT360080Z

[Schematic Diagram](#) 
[Schematic Diagram](#) (gif)

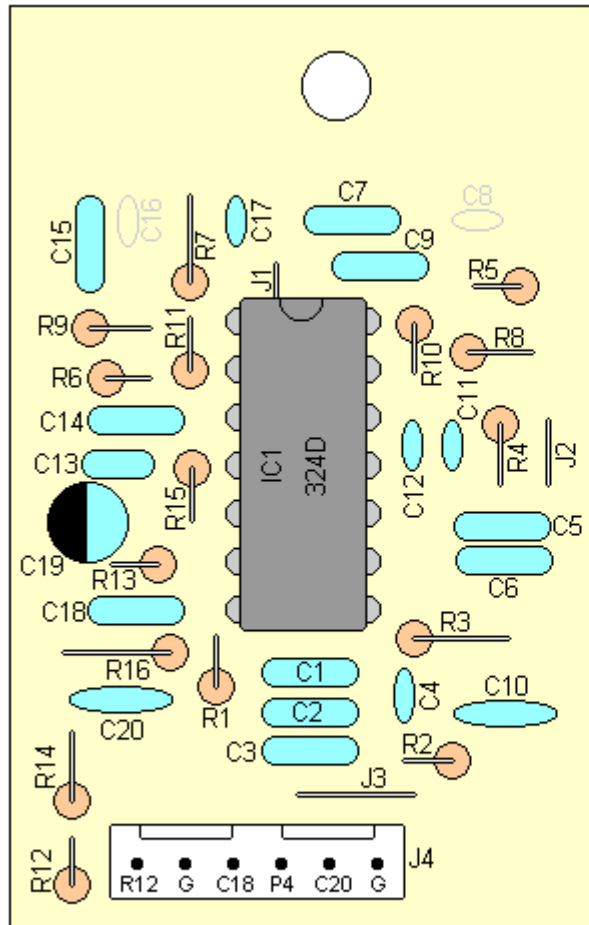

NOTE: C16 and C8 are not Installed

Copyright © 2002 CBTricks.com All rights reserved
 Rev. 1. 2

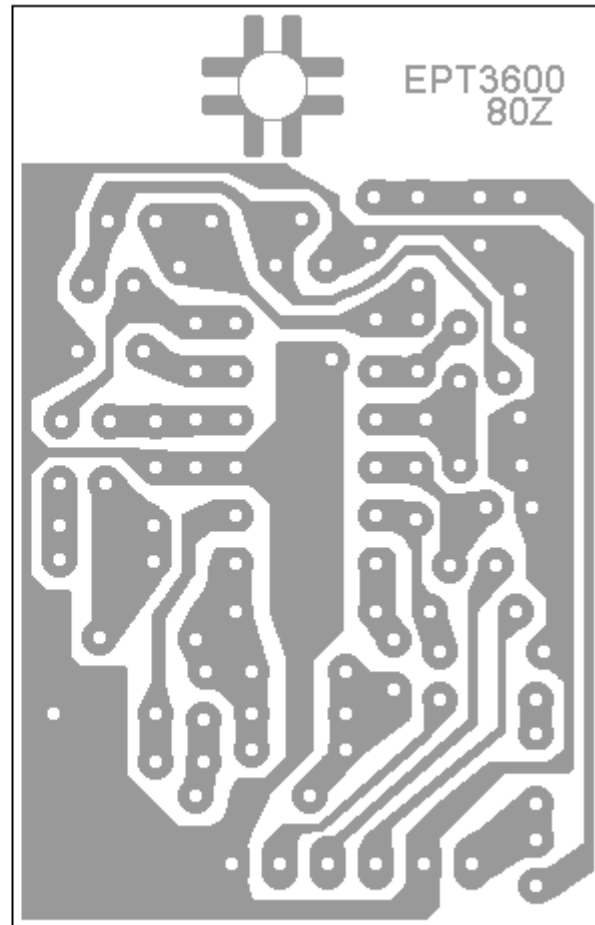

Galaxy DX Radios DX2517
 ANF PCB EPT360080Z

Ref#	Description	MFR. Part No.
R1	C/F/R F-TYPE 15K OHM 1/4W U	RCU141534Z
R2	C/F/R F-TYPE 15K OHM 1/4W U	RCU141534Z
R3	C/F/R F-TYPE 10K OHM 1/4 W U	RCU141034Z
R4	C/F/R F-TYPE 10K OHM 1/4 W U	RCU141034Z
R5	C/F/R F-TYPE 10K OHM 1/4 W U	RCU141034Z
R6	C/F/R F-TYPE 10K OHM 1/4 W U	RCU141034Z
R7	C/F/R F-TYPE 10K OHM 1/4 W U	RCU141034Z
R8	C/F/R F-TYPE 10K OHM 1/4 W U	RCU141034Z
R9	C/F/R F-TYPE 10K OHM 1/4 W U	RCU141034Z
R10	C/F/R F-TYPE 10K OHM 1/4 W U	RCU141034Z
R10	C/F/R 10 OHM 1/4W U	RCU141004Z
R11	C/F/R 270 OHM 1/4 W U	RCU142714Z

R12	C/F/R 27K OHM 1/4 W U	RCU142734Z
R13	C/F/R 100 OHM 1/4 W U	RCU141014Z
R15	C/F/R F-TYPE 100K OHM 1/4W U	RCU141044Z
R16	C/F/R F-TYPE 100K OHM 1/4W U	RCU141044Z

Ref#	Description	MFR. Part No.
C1	M/C 0.022UF 50WV K	CM0502235Z
C2	M/C 0.022UF 50WV K	CM0502235Z
C3	M/C 0.022UF 50WV K	CM0502235Z
C4	CHIP/C 0.01UF 50WV M	CH0501036A
C5	M/C 0.022UF 50WV K	CM0502235Z
C6	M/C 0.022UF 50WV K	CM0502235Z
C7	M/C 0.022UF 50WV K	CM0502235Z
C9	M/C 0.022UF 50WV K	CM0502235Z
C10	C/C 560PF 50WV SL K	CC0505615L
C11	CHIP/C 0.0047UF 50W V M	CH0504726A
C12	CHIP/C 0.0047UF 50W V M	CH0504726A
C13	M/C 0.001UF 50WV K	CM0501025Z
C14	M/C 0.0022UF 50WV K	CM0502225Z
C15	M/C 0.022UF 50WV K	CM0502235Z
C17	CHIP/C 0.0047UF 50W V M	CH0504726A
C18	M/C 0.01UF 50WV K	CM0501035Z
C19	E/C 47UF 16WV Z	CE0164767Z
C20	C/C 0.1UF 50WV SL Z	CC0501047L

Ref#	Description	MFR. Part No.
IC1	I.C.(JRC) NJM324D 14PIN	ENJR00324D

Ref#	Description	MFR. Part No.
J1	JUMPER WIRE 7x5x7	WX01070705
J2	JUMPER WIRE 7x4x7	WX01070704
J3	JUMPER WIRE 7x6x7	WX01070706
J4	PCB CONNECTOR/S 6P T PH=2.5 (WHITE)	EX07N41344

Copyright © 2002 CBTricks.com

Disclaimer: Although the greatest care has been taken while compiling these documents, we cannot guarantee that the instructions will work on every radio presented.