


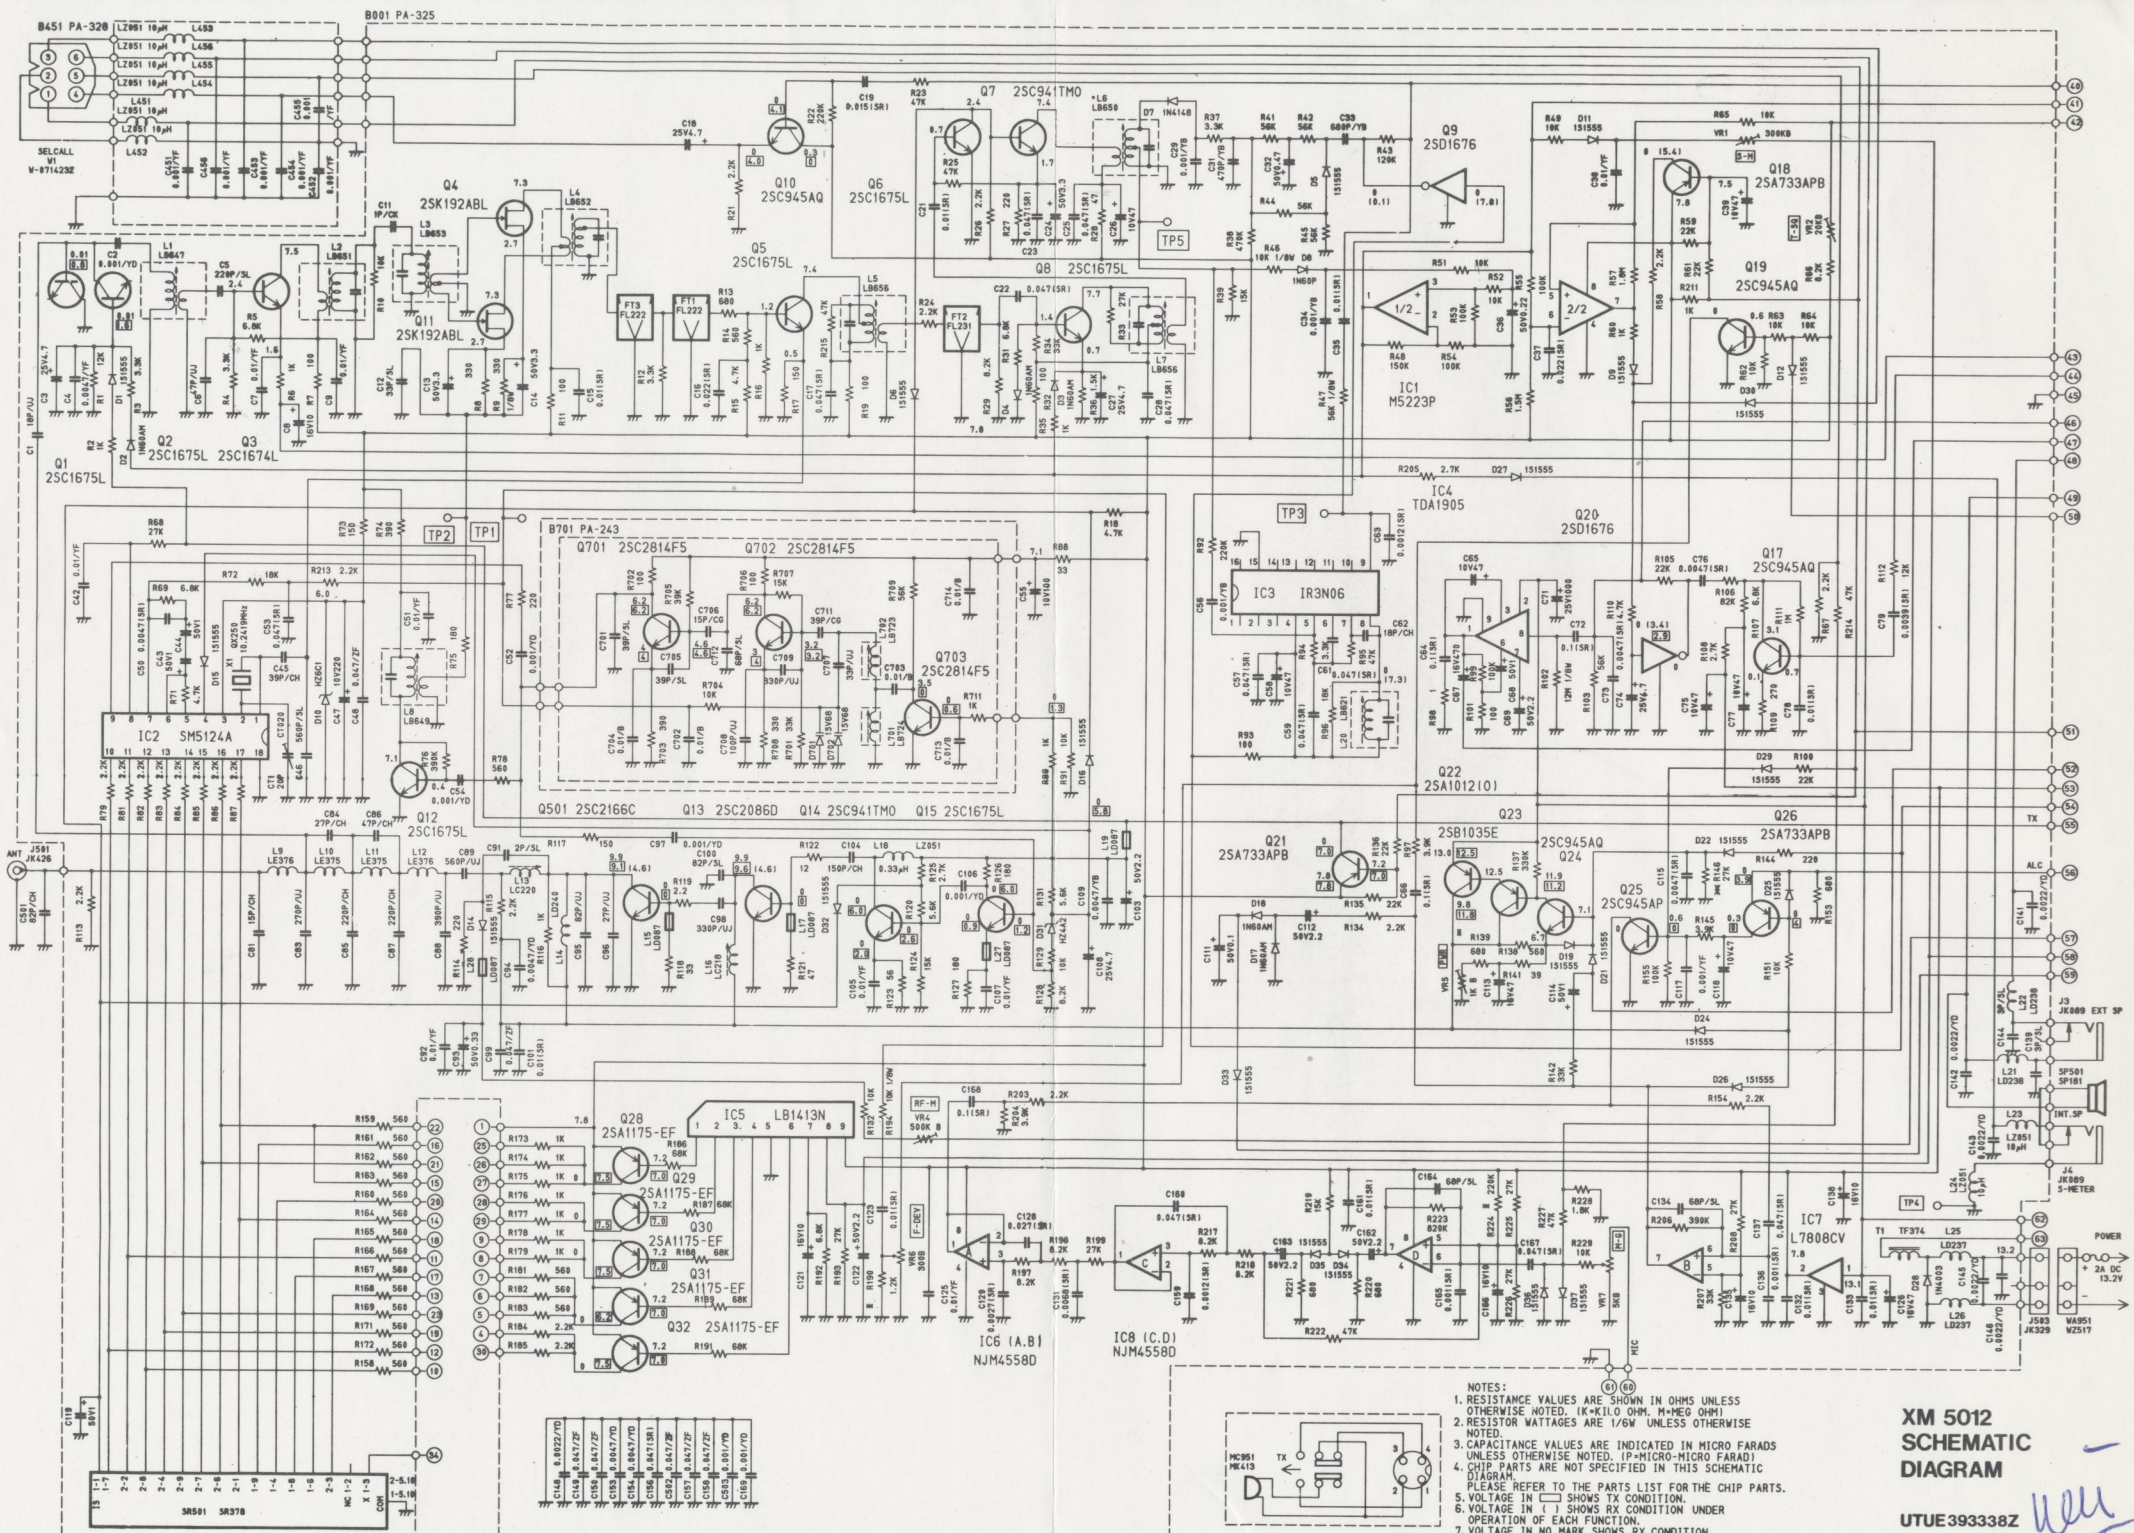

NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
2. RESISTOR WATTAGES ARE 1/6W UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=PICO-MICRO FARAD)
4. CHIP PARTS ARE NOT SPECIFIED IN THIS SCHEMATIC
5. VOLTAGE IN 1-1 SHOWS TX CONDITION
6. VOLTAGE IN 1-1 SHOWS RX CONDITION UNDER OPERATION OF EACH FUNCTION.
7. VOLTAGE IN 0 MARK SHOWS RX CONDITION.
RADJUSTED (TYPICAL VALUE SHOWN)

**XM 5012
SCHEMATIC
DIAGRAM**

UTUE393338Z

new

