


SCHEMATIC DI

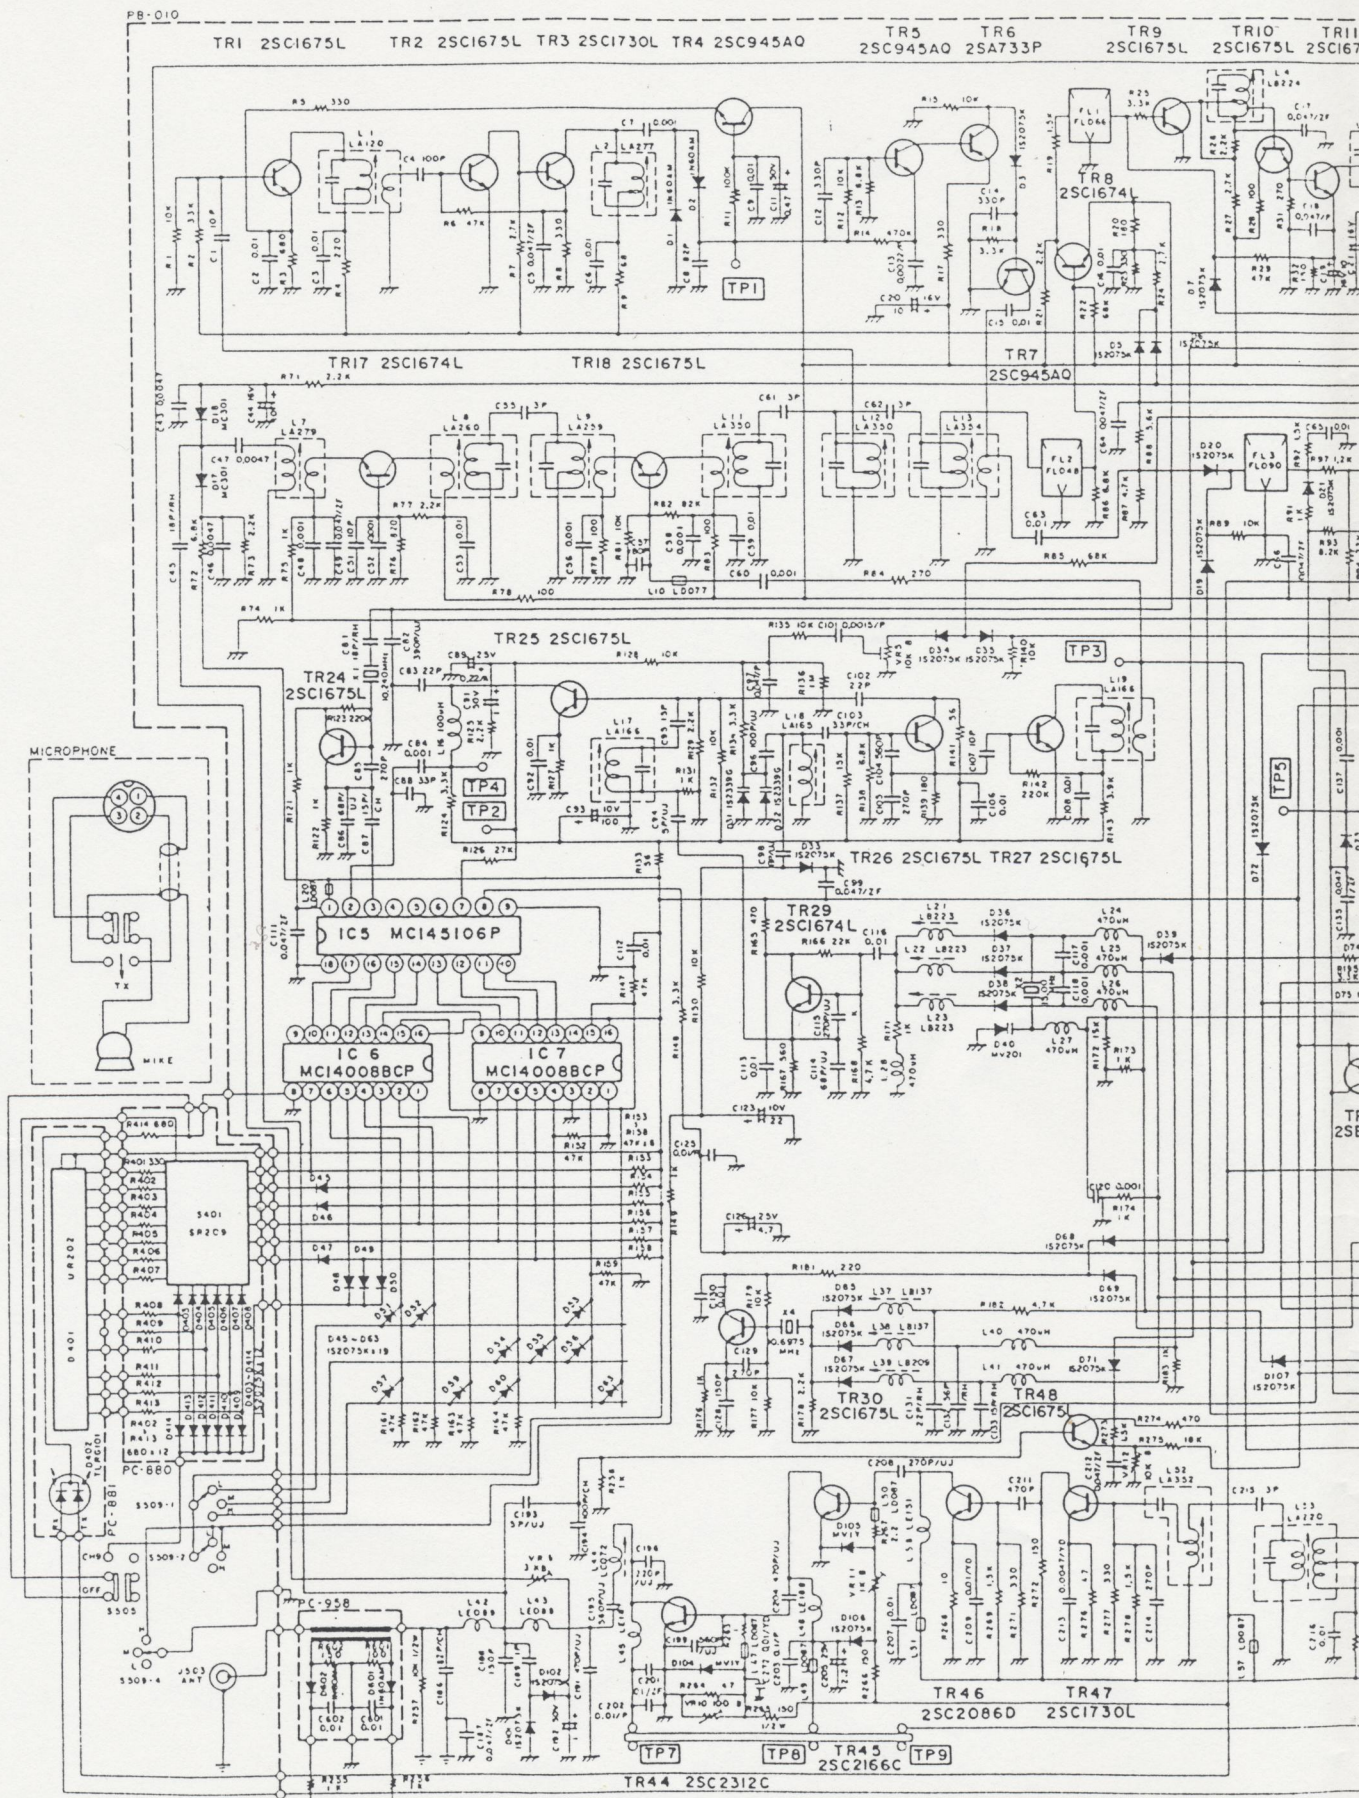

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED IN K Ω OR M Ω (K=10³, M=10⁶)
 2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE NOTED
 3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED (P=PICTO, MICROFARAD)
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE $\pm 1\%$ UNLESS THAN $\pm 100\text{PPM}/^{\circ}\text{C}$ IF MORE THAN $\pm 100\text{PPM}/^{\circ}\text{C}$ UNLESS OTHERWISE NOTED

2673