




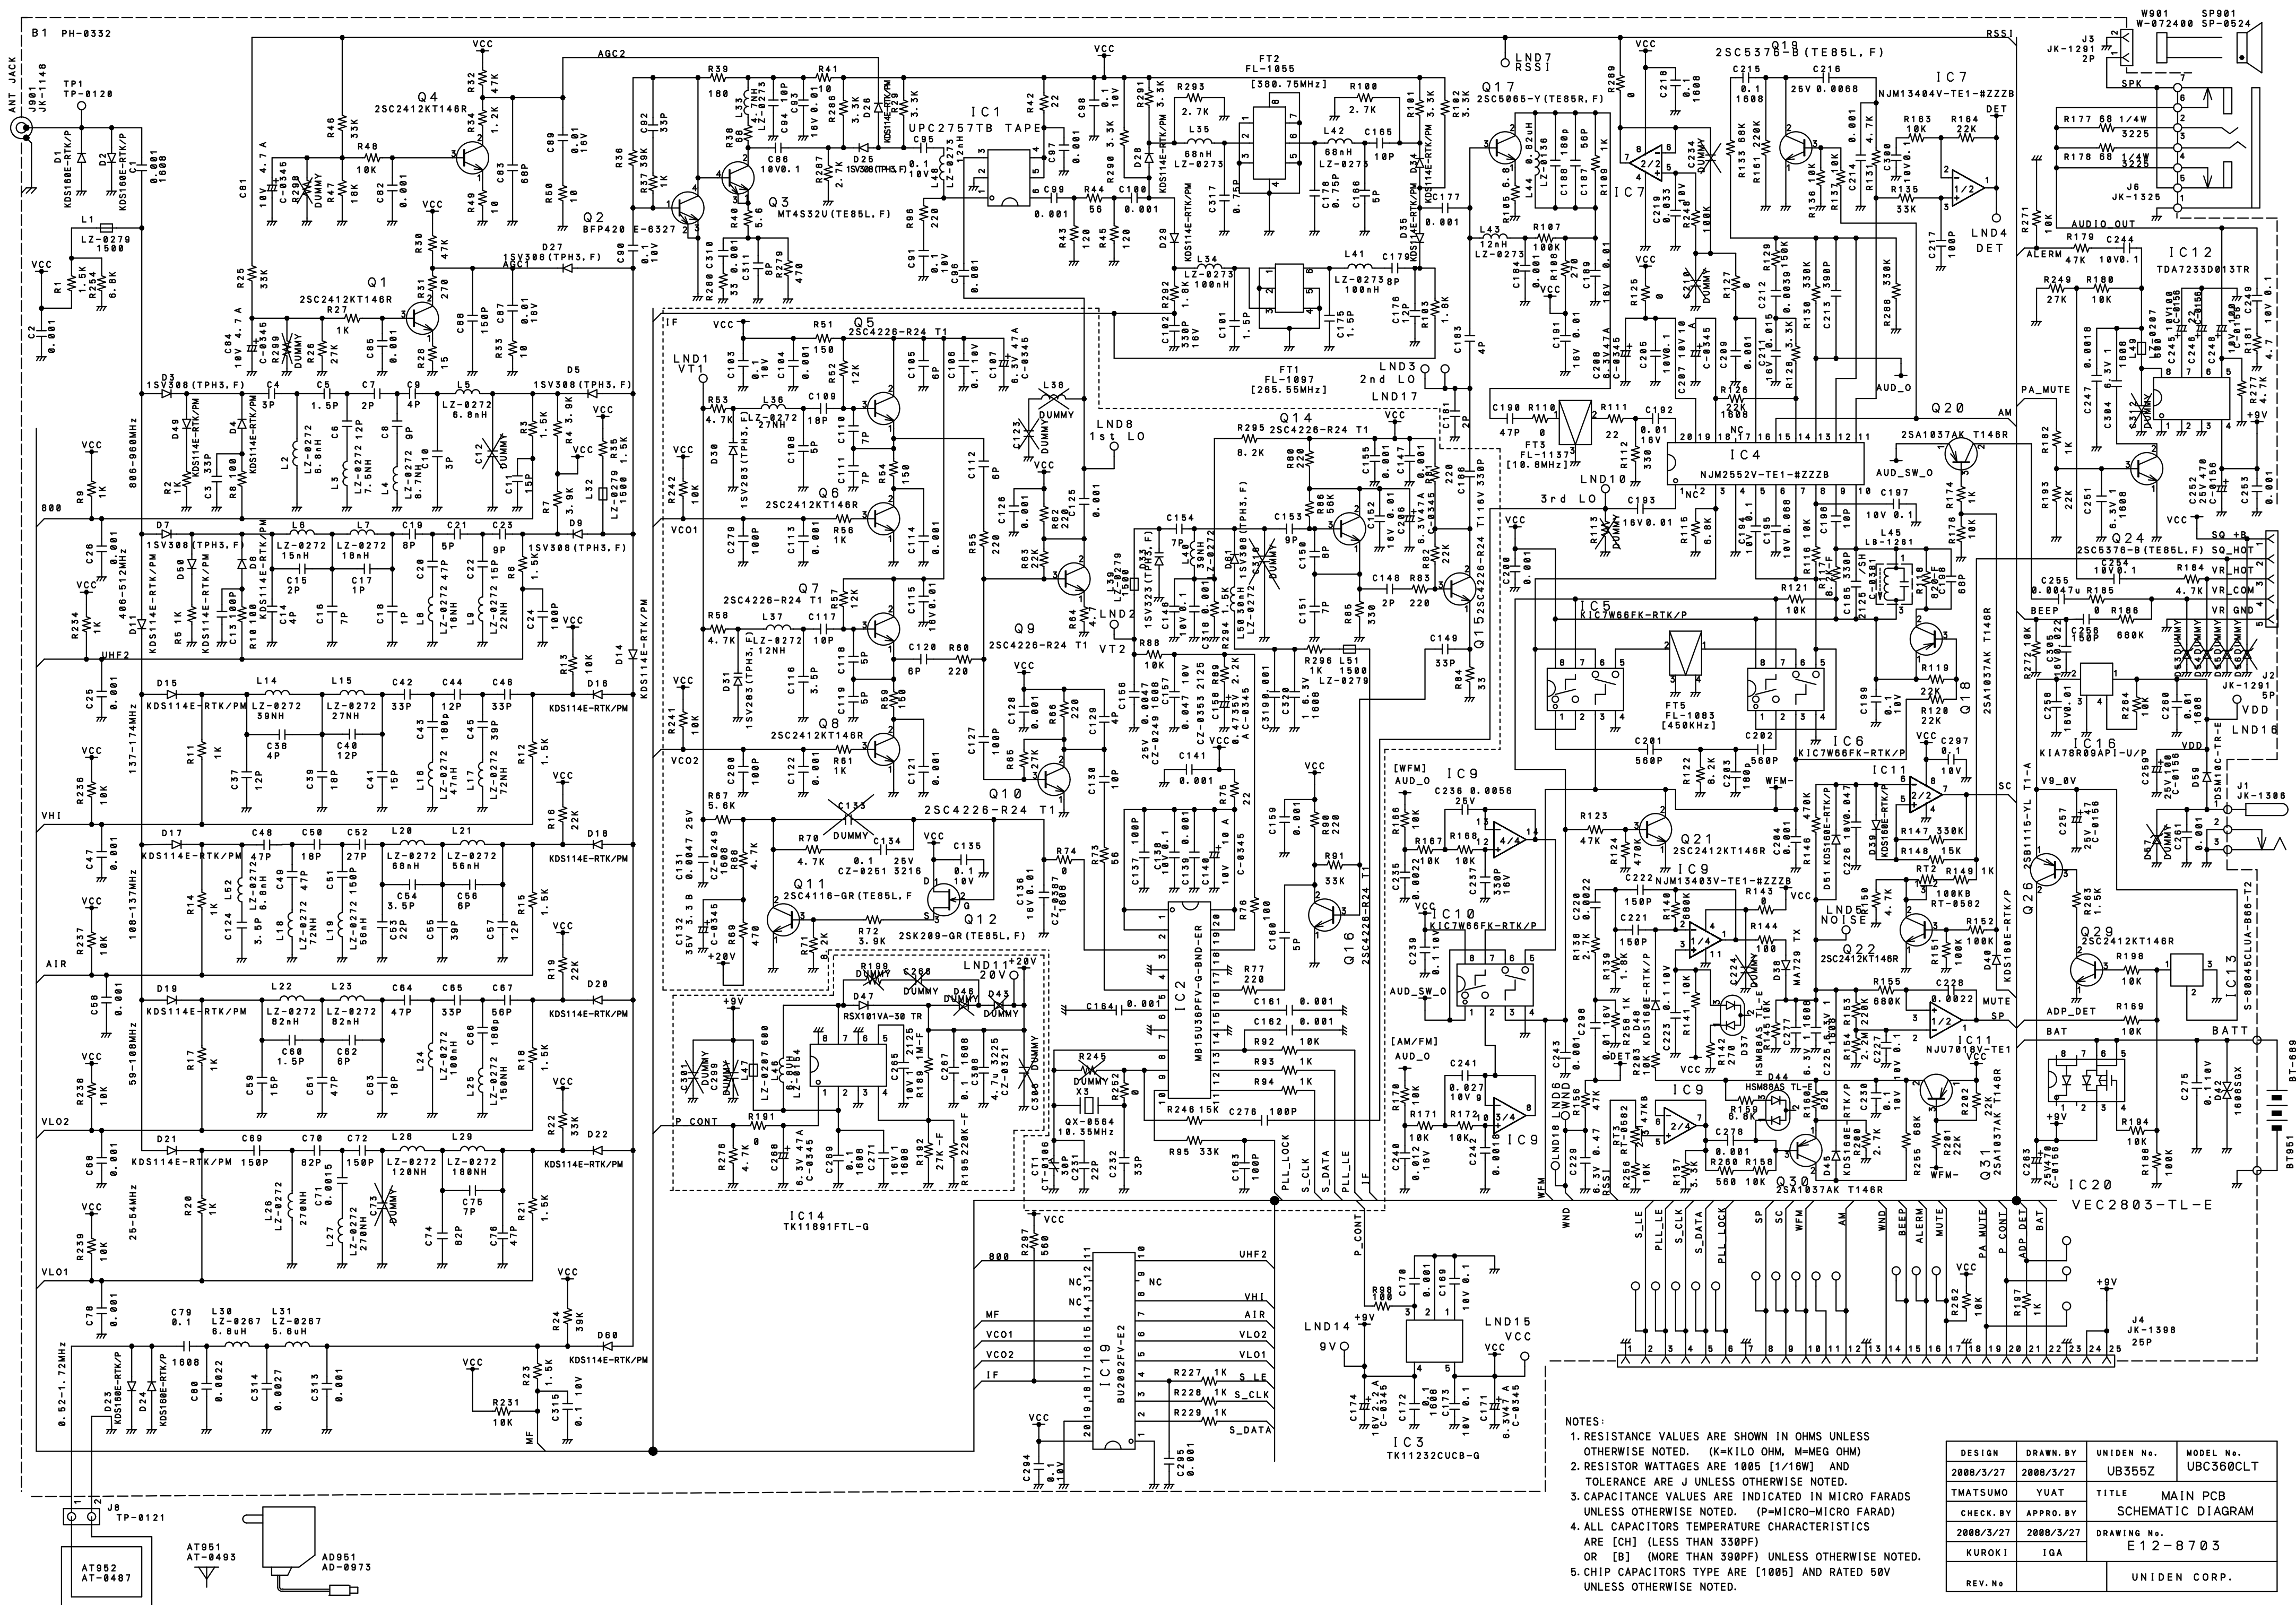


- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
 2. RESISTOR WATTAGES ARE 1005 [1/10W] AND TOLERANCE ARE J UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICRO FARAD)
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE [CH] (LESS THAN 330PF) OR [B] (MORE THAN 330PF) UNLESS OTHERWISE NOTED.
 5. CHIP CAPACITORS TYPE ARE [1005] AND RATED 50V UNLESS OTHERWISE NOTED.

DESIGN	DRAWN BY	UNIDEN No.	MODEL No.
2008/3/27	2008/3/27	UB355Z	UBC360CLT
TMATSUMO	YUAT	TITLE MAIN PCB	
CHECK BY	APPRO BY	SCHEMATIC DIAGRAM	
2008/3/27	2008/3/27	DRAWING No.	
KUROKI	IGA	E 12-8703	
REV. No			UNIDEN CORP.

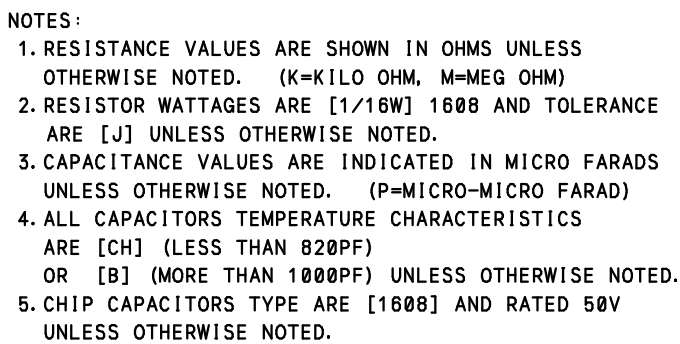

DESIGN	DRAWN. BY	UNIDEN No.	MODEL No.
2008/3/11	2008/3/11	UB355Z	UBC360CLT
KUROKI	KUROKI	TITLE LOGIC ASS'Y (1/2) SCHEMATIC DIAGRAM	
CHECK. BY	APPRO. BY		
2008/4/10	2008/4/10	DRAWING No. E13-8704	
TMATSUMO	IGA		
REV. No		UNIDEN CORP.	

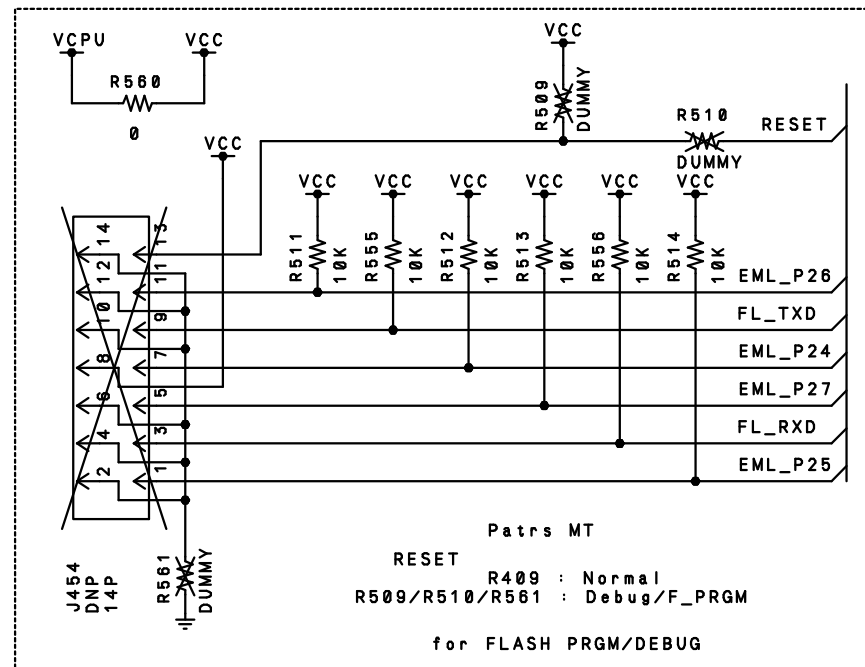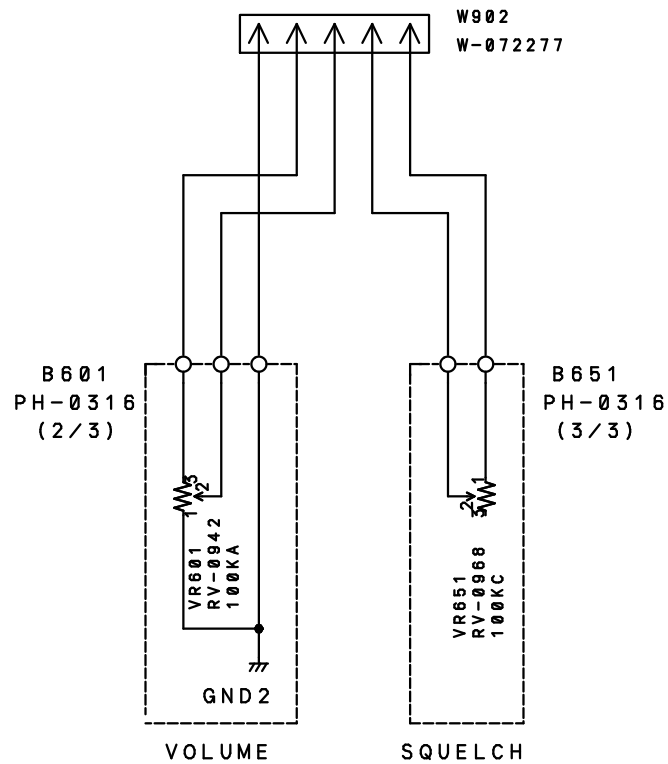

NOTES:

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
2. RESISTOR WATTAGES ARE [1/16W] 1608 UNLESS OTHERWISE NOTED.

DESIGN	DRAWN.BY	UNIDEN No.	MODEL No.
2008/3/11	2008/3/11	UB355Z	UBC360CLT
KUROKI	KUROKI	TITLE LOGIC ASS'Y (2/2) SCHEMATIC DIAGRAM	
CHECK.BY	APPRO.BY		
2008/4/10	2008/4/10	DRAWING No. E14-8705	
TMATSUMO	IGA		
REV.No		UNIDEN CORP.	